

# Notes of “Funktionen mehrerer Variablen”

Naoki Pross – naoki.pross@ost.ch

Spring Semester 2021

## 1 Preface

These are just my personal notes of the FuVar course, and definitively not a rigorously constructed mathematical text. The good looking L<sup>A</sup>T<sub>E</sub>X typesetting may trick you into thinking it is rigorous, but really, it is not.

## 2 Derivatives of vector valued scalar functions

**Definition 1** (Partial derivative). A vector valued function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$ , with  $\mathbf{v} \in \mathbb{R}^m$ , has a partial derivative with respect to  $v_i$  defined as

$$\partial_{v_i} f(\mathbf{v}) = \frac{\partial f}{\partial v_i} = \lim_{h \rightarrow 0} \frac{f(\mathbf{v} + h\mathbf{e}_i) - f(\mathbf{v})}{h}$$

**Theorem 1.** (Schwarz’s theorem, symmetry of partial derivatives) Under some generally satisfied conditions (continuity of  $n$ -th order partial derivatives) Schwarz’s theorem states that it is possible to swap the order of differentiation.

$$\partial_x \partial_y f(x, y) = \partial_y \partial_x f(x, y)$$

**Application 1** (Find the slope of an implicit curve). Let  $f(x, y) = 0$  be an implicit curve. It’s slope at any point where  $\partial_y f \neq 0$  is  $m = -\partial_x f / \partial_y f$

**Definition 2** (Total differential). The total differential  $df$  of  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  is

$$df = \sum_{i=0}^m \partial_{x_i} f \cdot dx.$$

That reads, the *total* change is the sum of the change in each direction. This implies

$$\frac{df}{dx_k} = \frac{\partial f}{\partial x_k} + \sum_{i \in \{1 \leq i \leq m; i \neq k\}} \frac{\partial f}{\partial x_i} \cdot \frac{dx_i}{dx_k},$$

i.e. the change in direction  $x_k$  is how  $f$  changes in  $x_k$  (ignoring other directions) plus, how  $f$  changes with respect to each other variable  $x_i$  times how it ( $x_i$ ) changes with respect to  $x_k$ .

**Application 2** (Linearization). A function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  has a linearization  $g$  at  $\mathbf{x}_0$  given by

$$g(\mathbf{x}) = f(\mathbf{x}_0) + \sum_{i=1}^m \partial_{x_i} f(\mathbf{x}_0)(x_i - x_{i,0}),$$

if all partial derivatives are defined at  $\mathbf{x}_0$ . With the gradient (defined below)  $g(\mathbf{x}) = f(\mathbf{x}_0) + \nabla f(\mathbf{x}_0) \cdot (\mathbf{x} - \mathbf{x}_0)$ .

**Application 3** (Propagation of uncertainty). Given a measurement of  $m$  values in a vector  $\mathbf{x} \in \mathbb{R}^m$  with values given in the form  $x_i = \bar{x}_i \pm \sigma_{x_i}$ , a linear approximation the error of a dependent variable  $y$  is computed with

$$y = \bar{y} \pm \sigma_y \approx f(\bar{\mathbf{x}}) \pm \sqrt{\sum_{i=1}^m (\partial_{x_i} f(\bar{\mathbf{x}}) \sigma_{x_i})^2}$$

**Definition 3** (Gradient vector). The *gradient* of a function  $f(\mathbf{x})$ ,  $\mathbf{x} \in \mathbb{R}^m$  is a column vector<sup>1</sup> containing the derivatives in each direction.

$$\nabla f(\mathbf{x}) = \sum_{i=1}^m \partial_{x_i} f(\mathbf{x}) \mathbf{e}_i = \begin{pmatrix} \partial_{x_1} f(\mathbf{x}) \\ \vdots \\ \partial_{x_m} f(\mathbf{x}) \end{pmatrix}$$

**Theorem 2.** The gradient vector always points towards *the direction of steepest ascent*, and thus is always perpendicular to contour lines.

**Definition 4** (Directional derivative). A function  $f(\mathbf{x})$  has a directional derivative in direction  $\mathbf{r}$  (with  $|\mathbf{r}| = 1$ ) of

$$\frac{\partial f}{\partial \mathbf{r}} = \nabla_{\mathbf{r}} f = \mathbf{r} \cdot \nabla f$$

**Definition 5** (Jacobian Matrix). The *Jacobian*  $\mathbf{J}_f$  (sometimes written as  $\frac{\partial(f_1, \dots, f_m)}{\partial(x_1, \dots, x_n)}$ ) of a function  $\mathbf{f} : \mathbb{R}^n \rightarrow \mathbb{R}^m$  is a matrix  $\in \mathbb{R}^{n \times m}$  whose entry at the  $i$ -th row and  $j$ -th column is given by  $(\mathbf{J}_f)_{i,j} = \partial_{x_j} f_i$ , so

$$\mathbf{J}_f = \begin{pmatrix} \partial_{x_1} f_1 & \cdots & \partial_{x_n} f_1 \\ \vdots & \ddots & \vdots \\ \partial_{x_1} f_m & \cdots & \partial_{x_n} f_m \end{pmatrix} = \begin{pmatrix} (\nabla f_1)^t \\ \vdots \\ (\nabla f_m)^t \end{pmatrix}$$

**Remark 1.** In the scalar case ( $m = 1$ ) the Jacobian matrix is the transpose of the gradient vector.

**Definition 6** (Hessian matrix). Given a function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$ , the square matrix whose entry at the  $i$ -th row and  $j$ -th column is the second derivative of  $f$  first with respect to  $x_j$  and then to  $x_i$  is known as the *Hessian* matrix.  $(\mathbf{H}_f)_{i,j} = \partial_{x_i} \partial_{x_j} f$  or

$$\mathbf{H}_f = \begin{pmatrix} \partial_{x_1} \partial_{x_1} f & \cdots & \partial_{x_1} \partial_{x_m} f \\ \vdots & \ddots & \vdots \\ \partial_{x_m} \partial_{x_1} f & \cdots & \partial_{x_m} \partial_{x_m} f \end{pmatrix}$$

Because (almost always) the order of differentiation does not matter, it is a symmetric matrix.

<sup>1</sup>In matrix notation it is also often defined as row vector to avoid having to do some transpositions in the Jacobian matrix and dot products in directional derivatives

### 3 Methods for maximization and minimization problems

#### 3.1 Analytical methods

**Method 1** (Find stationary points). Given a function  $f : D \subseteq \mathbb{R}^m \rightarrow \mathbb{R}$ , to find its maxima and minima we shall consider the points

- that are on the boundary<sup>2</sup> of the domain  $\partial D$ ,
- where the gradient  $\nabla f$  is not defined,
- that are stationary, i.e. where  $\nabla f = \mathbf{0}$ .

**Method 2** (Determine the type of stationary point for 2 dimensions). Given a scalar function of two variables  $f(x, y)$  and a stationary point  $\mathbf{x}_s$  (where  $\nabla f(\mathbf{x}_s) = \mathbf{0}$ ), we define the *discriminant*

$$\Delta = \partial_x^2 f \partial_y^2 f - \partial_y \partial_x f$$

- if  $\Delta > 0$  then  $\mathbf{x}_s$  is an extrema, if  $\partial_x^2 f(\mathbf{x}_s) < 0$  it is a maximum, whereas if  $\partial_x^2 f(\mathbf{x}_s) > 0$  it is a minimum;
- if  $\Delta < 0$  then  $\mathbf{x}_s$  is a saddle point;
- if  $\Delta = 0$  we need to analyze further.

**Remark 2.** The previous method is obtained by studying the second directional derivative  $\nabla_{\mathbf{r}} \nabla_{\mathbf{r}} f$  at the stationary point in direction of a vector  $\mathbf{r} = \mathbf{e}_1 \cos(\alpha) + \mathbf{e}_2 \sin(\alpha)$ .

**Method 3** (Determine the type of stationary point in higher dimensions). Given a scalar function of multiple variables  $f(\mathbf{x})$  and a stationary point  $\mathbf{x}_s$  ( $\nabla f(\mathbf{x}_s) = \mathbf{0}$ ), we compute the Hessian matrix  $\mathbf{H}_f(\mathbf{x}_s)$  and its eigenvalues  $\lambda_1, \dots, \lambda_m$ , then

- if all  $\lambda_i > 0$ , the point is a minimum;
- if all  $\lambda_i < 0$ , the point is a maximum;
- if there are both positive and negative eigenvalues, it is a saddle point.

In the other cases, when there are  $\lambda_i \leq 0$  and/or  $\lambda_i \geq 0$  further analysis is required.

**Remark 3.** Recall that to compute the eigenvalues of a matrix, one must solve the equation  $(\mathbf{H} - \lambda \mathbf{I})\mathbf{x} = \mathbf{0}$ . Which can be done by solving the characteristic polynomial  $\det(\mathbf{H} - \lambda \mathbf{I}) = 0$  to obtain  $\dim(\mathbf{H})$   $\lambda_i$ , which when plugged back in result in a overdetermined system of equations.

**Method 4** (Quickly find the eigenvalues of a  $2 \times 2$  matrix). This is a nice trick. For a square matrix  $\mathbf{H}$ , let

$$m = \frac{1}{2} \text{tr } \mathbf{H} = \frac{a+d}{2}, \quad p = \det \mathbf{H} = ad - bc,$$

then  $\lambda_{1,2} = m \pm \sqrt{m^2 - p}$ .

<sup>2</sup>If it belongs to  $f$ .

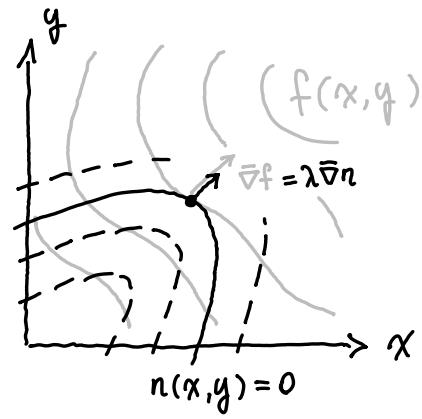


Figure 1: Intuition for the method of Lagrange multipliers. Extrema of a constrained function are where  $\nabla f$  is proportional to  $\nabla n$ .

**Method 5** (Search for a constrained extremum in 2 dimensions). Let  $n(x, y) = 0$  be a constraint in the search of the extrema of a function  $f : D \subseteq \mathbb{R}^2 \rightarrow \mathbb{R}$ . To find the extrema we look for points

- on the boundary<sup>2</sup>  $\mathbf{u} \in \partial D$  where  $n(\mathbf{u}) = 0$ ;
- $\mathbf{u}$  where the gradient either does not exist or is  $\mathbf{0}$ , and satisfy  $n(\mathbf{u}) = 0$ ;
- that solve the system of equations

$$\begin{cases} \partial_x f(\mathbf{u}) \cdot \partial_y n(\mathbf{u}) = \partial_y f(\mathbf{u}) \cdot \partial_x n(\mathbf{u}) \\ n(\mathbf{u}) = 0 \end{cases}$$

**Method 6** (Search for a constrained extremum in higher dimensions, method of Lagrange multipliers). We wish to find the extrema of  $f : D \subseteq \mathbb{R}^m \rightarrow \mathbb{R}$  under  $k < m$  constraints  $n_1 = 0, \dots, n_k = 0$ . To find the extrema we consider the following points:

- Points on the boundary<sup>2</sup>  $\mathbf{u} \in \partial D$  that satisfy  $n_i(\mathbf{u}) = 0$  for all  $1 \leq i \leq k$ ,
- Points  $\mathbf{u} \in D$  where either
  - any of  $\nabla f, \nabla n_1, \dots, \nabla n_k$  do not exist, or
  - $\nabla n_1, \dots, \nabla n_k$  are linearly dependent,
 and that satisfy  $0 = n_1(\mathbf{u}) = \dots = n_k(\mathbf{u})$ .
- Points that solve the system of  $m + k$  equations

$$\begin{cases} \nabla f(\mathbf{u}) = \sum_{i=1}^k \lambda_i \nabla n_i(\mathbf{u}) & (m\text{-dimensional}) \\ n_i(\mathbf{u}) = 0 & \text{for } 1 \leq i \leq k \end{cases}$$

The  $\lambda$  values are known as *Lagrange multipliers*. The same calculation can be written more compactly by defining the *Lagrangian*

$$\mathcal{L}(\mathbf{u}, \boldsymbol{\lambda}) = f(\mathbf{u}) - \sum_{i=0}^k \lambda_i n_i(\mathbf{u}),$$

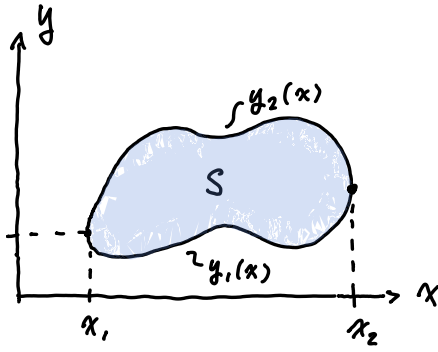


Figure 2: Double integral.

where  $\lambda = \lambda_1, \dots, \lambda_k$  and then solving the  $m + k$  dimensional equation  $\nabla \mathcal{L}(\mathbf{u}, \lambda) = \mathbf{0}$  (this is generally used in numerical computations and not very useful by hand).

### 3.2 Numerical methods

**Method 7** (Newton's method). For a function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  we wish to numerically find its stationary points (where  $\nabla f = \mathbf{0}$ ).

1. Pick a starting point  $\mathbf{x}_0$
2. Set the linearisation<sup>3</sup> of  $\nabla f$  at  $\mathbf{x}_k$  to zero and solve for  $\mathbf{x}_{k+1}$

$$\begin{aligned} \nabla f(\mathbf{x}_k) + \mathbf{H}_f(\mathbf{x}_k)(\mathbf{x}_{k+1} - \mathbf{x}_k) &= \mathbf{0} \\ \mathbf{x}_{k+1} &= \mathbf{x}_k - \mathbf{H}_f^{-1}(\mathbf{x}_k) \nabla f(\mathbf{x}_k) \end{aligned}$$

3. Repeat the last step until the magnitude of the error  $|\epsilon| = |\mathbf{H}_f^{-1}(\mathbf{x}_k) \nabla f(\mathbf{x}_k)|$  is sufficiently small.

**Method 8** (Gradient ascent / descent). Given  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  we wish to numerically find the stationary points (where  $\nabla f = \mathbf{0}$ ).

1. Define an arbitrarily small length  $\eta$  and a starting point  $\mathbf{x}_0$
2. Compute  $\mathbf{v} = \pm \nabla f(\mathbf{x}_k)$  (positive for ascent, negative for descent), then  $\mathbf{x}_{k+1} = \mathbf{x}_k + \eta \mathbf{v}$  if the rate of change  $\epsilon$  is acceptable ( $\epsilon = |\nabla f(\mathbf{x}_{k+1})| > 0$ ) else recompute  $\mathbf{v} := \pm \nabla f(\mathbf{x}_{k+1})$ .
3. Stop when the rate of change  $\epsilon$  stays small enough for many iterations.

## 4 Integration of vector valued scalar functions

**Theorem 3** (Change the order of integration for double integrals). For a double integral over a region  $S$  (see Fig. 2) we need to compute

$$\iint_S f(x, y) ds = \int_{x_1}^{x_2} \int_{y_1(x)}^{y_2(x)} f(x, y) dy dx.$$

<sup>3</sup>The gradient becomes a hessian matrix.

	Volume $dv$	Surface $ds$
Cartesian	—	$dx dy$
Polar	—	$r dr d\phi$
Curvilinear	—	$ \mathbf{J}_f  du dv$
Cartesian	$dx dy dz$	$\hat{\mathbf{z}} dx dy$
Cylindrical	$r dr d\phi dz$	$\hat{\mathbf{z}} r dr d\phi$ $\hat{\phi} dr dz$ $\hat{\mathbf{r}} r d\phi dz$
Spherical	$r^2 \sin \theta dr d\theta d\phi$	$\hat{\mathbf{r}} r^2 \sin \theta d\theta d\phi$
Curvilinear	$ \mathbf{J}_f  du dv dw$	—

Table 1: Differential elements for integration.

If  $y_1(x)$  and  $y_2(x)$  are bijective we can swap the order of integration by finding the inverse functions  $x_1(y)$  and  $x_2(y)$ . If they are not bijective (like in Fig. 2), the region must be split into smaller parts. If the region is a rectangle it is always possible to change the order of integration.

**Theorem 4** (Transformation of coordinates in 2 dimensions). Given two “nice” functions  $x(u, v)$  and  $y(u, v)$ , that means are a bijection from  $S$  to  $S'$  with continuous partial derivatives and nonzero Jacobian determinant  $|\mathbf{J}_f| = \partial_u x \partial_v y - \partial_v x \partial_u y$ , which transform the coordinate system. Then

$$\iint_S f(x, y) ds = \iint_{S'} f(x(u, v), y(u, v)) |\mathbf{J}_f| ds$$

**Theorem 5** (Transformation of coordinates). The generalization of theorem 4 is quite simple. For an  $m$ -integral of a function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  over a region  $B$ , we let  $\mathbf{x}(\mathbf{u})$  be “nice” functions that transform the coordinate system. Then as before

$$\int_B f(\mathbf{x}) ds = \int_{B'} f(\mathbf{x}(\mathbf{u})) |\mathbf{J}_f| ds$$

**Application 4** (Physics). Given the mass  $m$  and density function  $\rho$  of an object, its *center of mass* is calculated with

$$\mathbf{x}_c = \frac{1}{m} \int_V \mathbf{x} \rho(\mathbf{x}) dv \stackrel{\rho \text{ const.}}{=} \frac{1}{V} \int_V \mathbf{x} dv.$$

The (scalar) *moment of inertia*  $J$  of an object is given by

$$J = \int_V \rho(\mathbf{r}) r^2 dv.$$

## 5 Parametric curves, line and surface integrals

**Definition 7** (Parametric curve). A parametric curve is a vector function  $\mathcal{C} : \mathbb{R} \rightarrow W \subseteq \mathbb{R}^n, t \mapsto \mathbf{f}(t)$ , that takes a parameter  $t$ .

**Definition 8** (Multivariable chain rule). Let  $\mathbf{x} : \mathbb{R} \rightarrow \mathbb{R}^m$  and  $f : \mathbb{R}^m \rightarrow \mathbb{R}$ , so that  $f \circ \mathbf{x} : \mathbb{R} \rightarrow \mathbb{R}$ , then the multivariable chain rule states:

$$\frac{d}{dt} f(\mathbf{x}(t)) = \nabla f(\mathbf{x}(t)) \cdot \mathbf{x}'(t) = \nabla_{\mathbf{x}'(t)} f(\mathbf{x}(t))$$

**Theorem 6** (Signed area enclosed by a planar parametric curve). A planar (2D) parametric curve  $(x(t), y(t))^t$  with  $t \in [r, s]$  that does not intersect itself encloses a surface with area

$$A = \int_r^s x'(t)y(t) dt = \int_r^s x(t)y'(t) dt$$

**Theorem 7** (Derivative of a curve). The derivative of a curve is

$$\begin{aligned} \mathbf{f}'(t) &= \lim_{h \rightarrow 0} \frac{\mathbf{f}(t+h) - \mathbf{f}(t)}{h} \\ &= \sum_{i=1}^n \left( \lim_{h \rightarrow 0} \frac{f_i(t+h) - f_i(t)}{h} \right) \mathbf{e}_i \\ &= \sum_{i=1}^n \frac{df_i}{dt} \mathbf{e}_i = \left( \frac{df_1}{dt}, \dots, \frac{df_m}{dt} \right)^t \end{aligned}$$

**Definition 9** (Line integral in a scalar field). Let  $\mathcal{C} : [a, b] \rightarrow \mathbb{R}^n, t \mapsto \mathbf{x}(t)$  be a parametric curve. The *line integral* in a field  $f(\mathbf{x})$  is the integral of the signed area under the curve traced in  $\mathbb{R}^n$ , and is computed with

$$\int_{\mathcal{C}} f(\mathbf{x}) dl = \int_{\mathcal{C}} f(\mathbf{x}) |d\mathbf{x}| = \int_a^b f(\mathbf{x}(t)) |\mathbf{x}'(t)| dt$$

**Application 5** (Length of a parametric curve). By computing the line integral of the function  $\mathbf{1}(t) = 1$  we get the length of the parametric curve  $\mathcal{C} : [a, b] \rightarrow \mathbb{R}^n$ .

$$\int_{\mathcal{C}} dl = \int_{\mathcal{C}} |d\mathbf{x}| = \int_a^b \sqrt{\sum_{i=1}^n x_i'(t)^2} dt$$

In the special case with the scalar function  $f(x)$  results in  $\int_a^b \sqrt{1 + f'(x)^2} dx$

**Definition 10** (Line integral in a vector field). The line integral in a vector field  $\mathbf{F}(\mathbf{x})$  is “sum” of the projections of the field’s vectors on the tangent of the parametric curve  $\mathcal{C}$ .

$$\int_{\mathcal{C}} \mathbf{F}(\mathbf{r}) \cdot d\mathbf{r} = \int_a^b \mathbf{F}(\mathbf{r}(t)) \cdot \mathbf{r}'(t) dt$$

**Theorem 8** (Line integral in the opposite direction). By integrating while moving backwards ( $-t$ ) on the parametric curve gives

$$\int_{-\mathcal{C}} \mathbf{F}(\mathbf{r}) \cdot d\mathbf{r} = - \int_{\mathcal{C}} \mathbf{F}(\mathbf{r}) \cdot d\mathbf{r}$$

**Definition 11** (Conservative field). A vector field is said to be *conservative* the line integral over a closed path is zero.

$$\oint_{\mathcal{C}} \mathbf{F}(\mathbf{r}) \cdot d\mathbf{r} = 0$$

**Theorem 9.** For a twice partially differentiable vector field  $\mathbf{F}(\mathbf{x})$  in  $n$  dimensions without “holes”, i.e. in which each closed curve can be contracted to a point (simply connected open set), the following statements are equivalent:

- $\mathbf{F}$  is conservative
- $\mathbf{F}$  is path-independent
- $\mathbf{F}$  is a *gradient field*, i.e. there is a function  $\phi$  called *potential* such that  $\mathbf{F} = \nabla\phi$
- $\mathbf{F}$  satisfies the condition  $\partial_{x_j} F_i = \partial_{x_i} F_j$  for all  $i, j \in \{1, 2, \dots, n\}$ . In the 2D case  $\partial_x F_y = \partial_y F_x$ , and in 3D

$$\begin{cases} \partial_y F_x = \partial_x F_y \\ \partial_z F_y = \partial_y F_z \\ \partial_x F_z = \partial_z F_x \end{cases}$$

**Theorem 10.** In a conservative field  $\mathbf{F}$  with gradient  $\phi$ , using the multivariable the chain rule:

$$\begin{aligned} \int_{\mathcal{C}} \mathbf{F} \cdot d\mathbf{r} &= \int_{\mathcal{C}} \mathbf{F}(\mathbf{r}(t)) \cdot \mathbf{r}'(t) dt \\ &= \int_{\mathcal{C}} \nabla\phi(\mathbf{r}(t)) \cdot \mathbf{r}'(t) dt \\ &= \int_{\mathcal{C}} \frac{d\phi(\mathbf{r}(t))}{dt} dt = \phi(\mathbf{r}(b)) - \phi(\mathbf{r}(a)) \end{aligned}$$

**Definition 12** (Parametric surface). A parametric surface is a vector function  $\mathcal{S} : W \subseteq \mathbb{R}^2 \rightarrow \mathbb{R}^3$ .

**Theorem 11** (Area of a parametric surface). The area spanned by a parametric surface  $\mathbf{s}(u, v)$ , with continuous partial derivatives and that satisfy  $\partial_u \mathbf{s} \times \partial_v \mathbf{s} \neq \mathbf{0}$ , is given by

$$A = \int_{\mathcal{S}} ds = \iint_W |\partial_u \mathbf{s} \times \partial_v \mathbf{s}| du dv$$

**Definition 13** (Scalar surface integral). Let  $f : \mathbb{R}^3 \rightarrow \mathbb{R}$  be a function on a parametric surface  $\mathbf{s} : W \subseteq \mathbb{R}^2 \rightarrow \mathbb{R}^3$ . The surface integral of  $f$  over  $\mathcal{S}$  is

$$\int_{\mathcal{S}} f ds = \iint_W f(\mathbf{s}(u, v)) \cdot |\partial_u \mathbf{s} \times \partial_v \mathbf{s}| du dv$$

## 6 Vector analysis

**Definition 14** (Flux). In a vector field  $\mathbf{F} : \mathbb{R}^m \rightarrow \mathbb{R}^n$  we define the *flux* through a parametric surface  $\mathcal{S}$  as

$$\Phi = \int_{\mathcal{S}} \mathbf{F} \cdot d\mathbf{s} = \int_{\mathcal{S}} \mathbf{F} \cdot \hat{\mathbf{n}} ds.$$

If  $\mathcal{S}$  is a closed surface we write  $\dot{\Phi} = \oint_{\mathcal{S}} \mathbf{F} \cdot d\mathbf{s}$ .

If we now take the normalized flux on the surface of an arbitrarily small (limit) volume  $V$  we get the *divergence*

$$\nabla \cdot \mathbf{F} = \lim_{V \rightarrow 0} \frac{1}{V} \oint_{\partial V} \mathbf{F} \cdot d\mathbf{s}.$$

**Theorem 12** (Formula for divergence). Let  $\mathbf{F} : \mathbb{R}^m \rightarrow \mathbb{R}^m$  be a vector field. The divergence of  $\mathbf{F} = (F_{x_1}, \dots, F_{x_m})^t$  is

$$\nabla \cdot \mathbf{F} = \sum_{i=1}^m \partial_{x_i} F_{x_i},$$

as suggested by the (ab)use of the dot product notation.

**Theorem 13** (Divergence theorem, Gauss's theorem). Because the flux on the boundary  $\partial V$  of a volume  $V$  contains information of the field inside of  $V$ , it is possible to relate the two with

$$\int_V \nabla \cdot \mathbf{F} \, dv = \oint_{\partial V} \mathbf{F} \cdot d\mathbf{s}.$$

**Definition 15** (Circulation, Vorticity). The result of a closed line integral can be interpreted as a macroscopic measure of how much the field rotates around a given point, and is thus sometimes called *circulation* or *vorticity*.

As before, if we now make the area  $A$  enclosed by the parametric curve for the circulation arbitrarily small, normalize it, and use Gauss's theorem we get a local measure called *curl*

$$\nabla \times \mathbf{F} = \lim_{A \rightarrow 0} \frac{\hat{\mathbf{n}}}{A} \oint_{\partial A} \mathbf{F} \cdot d\mathbf{s}$$

Notice that the curl is a vector, normal to the enclosed surface  $A$ .

**Theorem 14** (Formula for curl). Let  $\mathbf{F}$  be a vector field. In 2 dimensions

$$\nabla \times \mathbf{F} = (\partial_x F_y - \partial_y F_x) \hat{\mathbf{z}}.$$

And in 3D

$$\nabla \times \mathbf{F} = \begin{pmatrix} \partial_y F_z - \partial_z F_y \\ \partial_z F_x - \partial_x F_z \\ \partial_x F_y - \partial_y F_x \end{pmatrix} = \begin{vmatrix} \hat{\mathbf{x}} & \hat{\mathbf{y}} & \hat{\mathbf{z}} \\ \partial_x & \partial_y & \partial_z \\ F_x & F_y & F_z \end{vmatrix}.$$

**Theorem 15** (Stokes' theorem).

$$\int_S \nabla \times \mathbf{F} \cdot d\mathbf{s} = \oint_{\partial S} \mathbf{F} \cdot d\mathbf{r}$$

**Theorem 16** (Green's theorem). The special case of Stokes' theorem in 2D is known as Green's theorem.

$$\int_S (\partial_x F_y - \partial_y F_x) \, ds = \oint_{\partial S} \mathbf{F} \cdot d\mathbf{r}$$

**Definition 16** (Laplacian operator). A second vector derivative is so important that it has a special name. For a scalar function  $f : \mathbb{R}^m \rightarrow \mathbb{R}$  the divergence of the gradient

$$\nabla^2 = \nabla \cdot (\nabla f) = \sum_{i=1}^m \partial_{x_i}^2 f_{x_i}$$

is called the *Laplacian operator*.

**Definition 17** (Vector Laplacian). The Laplacian operator can be extended on a vector field  $\mathbf{F}$  to the *Laplacian vector* by applying the Laplacian to each component:

$$\nabla^2 \mathbf{F} = (\nabla^2 F_x) \hat{\mathbf{x}} + (\nabla^2 F_y) \hat{\mathbf{y}} + (\nabla^2 F_z) \hat{\mathbf{z}}.$$

The vector Laplacian can also be defined as

$$\nabla^2 \mathbf{F} = \nabla(\nabla \cdot \mathbf{F}) - \nabla \times (\nabla \times \mathbf{F}).$$

**Theorem 17** (Product rules and second derivatives). Let  $f, g$  be sufficiently differentiable scalar functions  $D \subseteq \mathbb{R}^m \rightarrow \mathbb{R}$  and  $\mathbf{A}, \mathbf{B}$  be sufficiently differentiable vector fields in  $\mathbb{R}^m$  (with  $m = 2$  or  $3$  for equations with the curl).

- Rules with the gradient

$$\begin{aligned} \nabla(\nabla \cdot \mathbf{A}) &= \nabla \times \nabla \times \mathbf{A} + \nabla^2 \mathbf{A} \\ \nabla(f \cdot g) &= (\nabla f) \cdot g + f \cdot \nabla g \\ \nabla(\mathbf{A} \cdot \mathbf{B}) &= (\mathbf{A} \cdot \nabla) \mathbf{B} + (\mathbf{B} \cdot \nabla) \mathbf{A} \\ &\quad + \mathbf{A} \times (\nabla \times \mathbf{B}) + \mathbf{B} \times (\nabla \times \mathbf{A}) \end{aligned}$$

- Rules with the divergence

$$\begin{aligned} \nabla \cdot (\nabla f) &= \nabla^2 f \\ \nabla \cdot (\nabla \times \mathbf{A}) &= 0 \\ \nabla \cdot (f \cdot \mathbf{A}) &= (\nabla f) \cdot \mathbf{A} + f \cdot (\nabla \cdot \mathbf{A}) \\ \nabla \cdot (\mathbf{A} \times \mathbf{B}) &= (\nabla \times \mathbf{A}) \cdot \mathbf{B} - \mathbf{A} \cdot (\nabla \times \mathbf{B}) \end{aligned}$$

- Rules with the curl

$$\begin{aligned} \nabla \times (\nabla f) &= \mathbf{0} \\ \nabla \times (\nabla \times \mathbf{A}) &= \nabla(\nabla \cdot \mathbf{A}) - \nabla^2 \mathbf{A} \\ \nabla \times (\nabla^2 \mathbf{A}) &= \nabla^2 (\nabla \times \mathbf{A}) \\ \nabla \times (f \cdot \mathbf{A}) &= (\nabla f) \times \mathbf{A} + f \cdot \nabla \times \mathbf{A} \\ \nabla \times (\mathbf{A} \times \mathbf{B}) &= (\mathbf{B} \cdot \nabla) \mathbf{A} - (\mathbf{A} \cdot \nabla) \mathbf{B} \\ &\quad + \mathbf{A} \cdot (\nabla \cdot \mathbf{B}) - \mathbf{B} \cdot (\nabla \cdot \mathbf{A}) \end{aligned}$$

## License

This work is licensed under a [“CC BY-NC-SA 4.0”](https://creativecommons.org/licenses/by-nc-sa/4.0/) license.

